



CL 982M/983M/984RM/985M

Collettore di distribuzione semplice da 2 a 5 derivazioni 1/2"-3/4"

Caratteristiche

- Collettore in ottone stampato grezzo con superfici interne gialle;
- Collegabili a tubi multistrato, PEX, rame;

Distribution Manifold closed circuit from 2 to 5 ways 1/2"-3/4"

Features

- Hot brass stamped distribution manifold with yellow inlet surface;
- For Multilayer, PEX or Copper Pipes;

Collecteur de distribution simple avec 2 jusqu'à 5 voies 1/2"-3/4"

Fonctionnalités

- Collecteur matricé en laiton brut avec surface interieur laiton brut;
- Connexions à tubes multicouche, PER, Cuivre;

Dettagli tecnici

Corpo: Ottone stampato CW617N UNI EN 12165

Filettatura: ISO 228-1

Temperatura Max: 95°C

Pressione Max: 10 Bar

Interasse partenze: 35/45 mm

Technical details

Body: Stamped Brass CW617N UNI EN 12165

Threads: ISO 228-1

Max Temperature: 95°C

Max Pressure: 10 Bar

Wheelbase: 35/45 mm

Fiche technique

Corp: Laiton matricé CW617N UNI EN 12165





Taraudage: ISO 228-1

Max Temperature: 95°C





Max Pression: 10 Bar

Entraxe: 35/45 mm

CL 982/3/4/5M IN 3/4" - OUT 1/2"

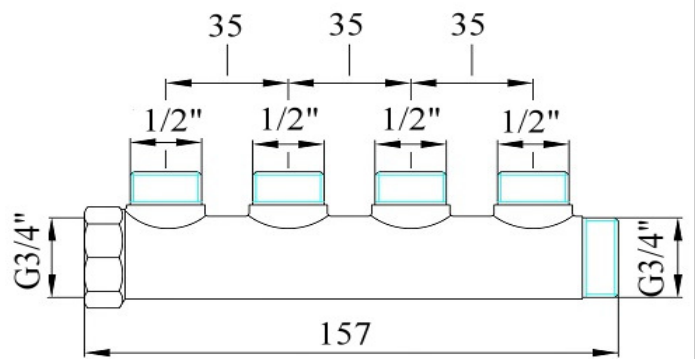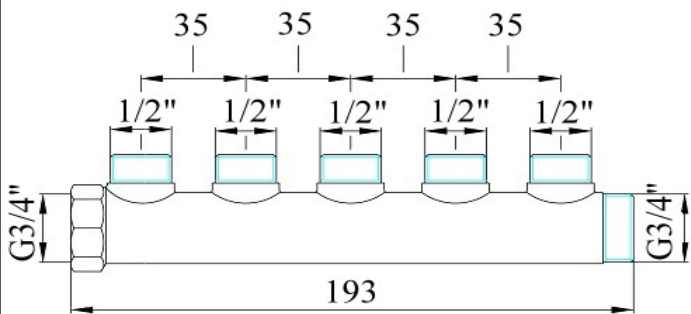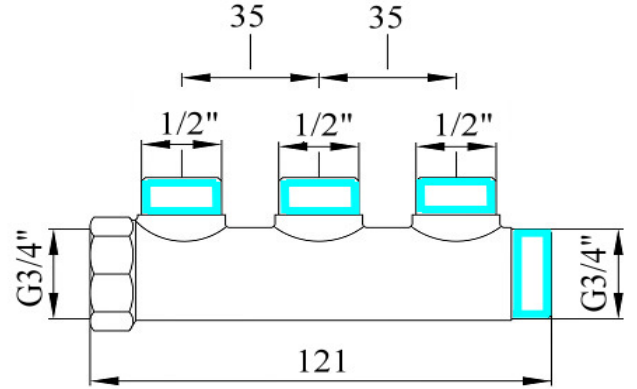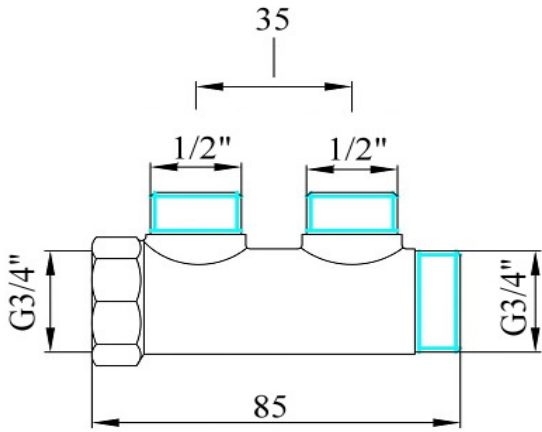

CL 982/3/4/5M IN 1" - OUT 1/2"

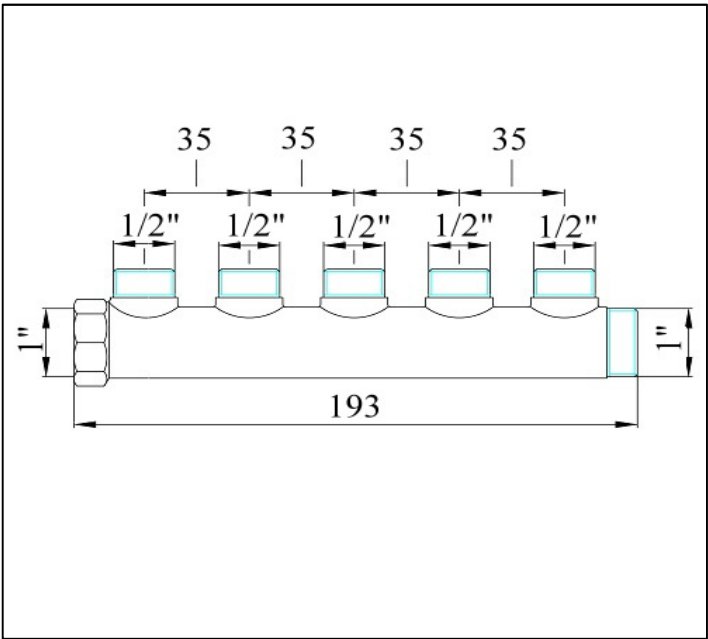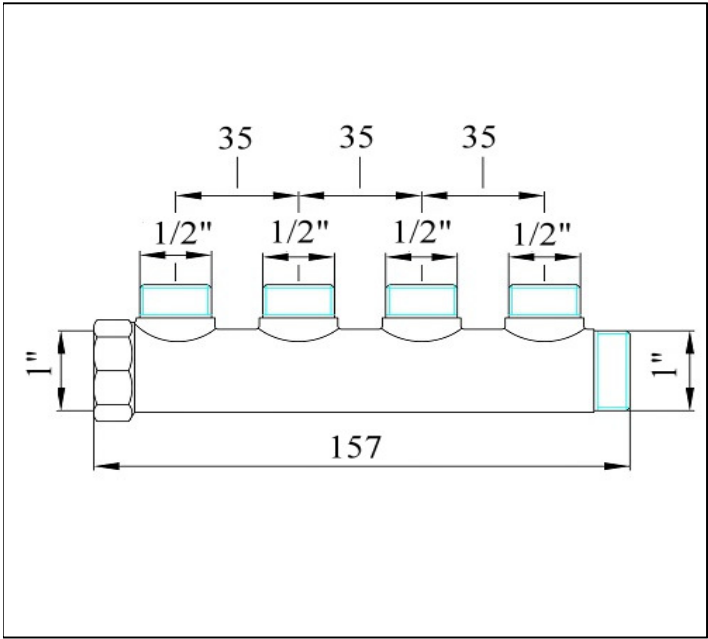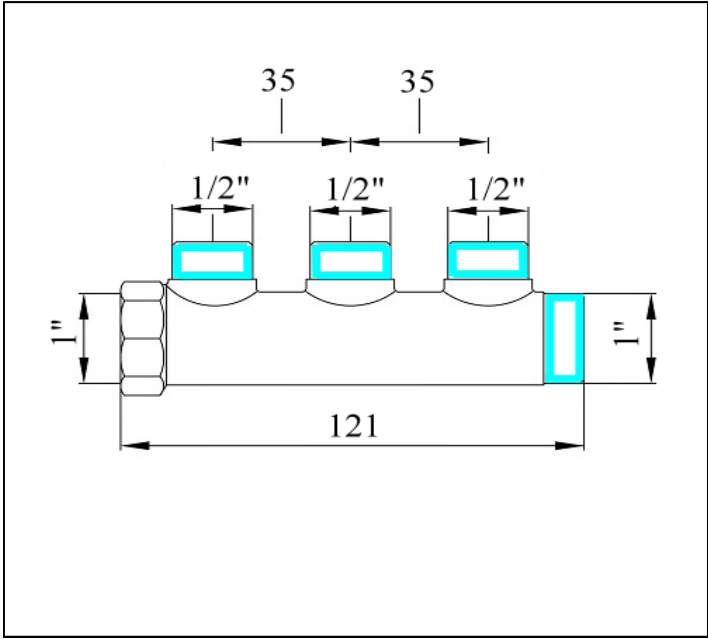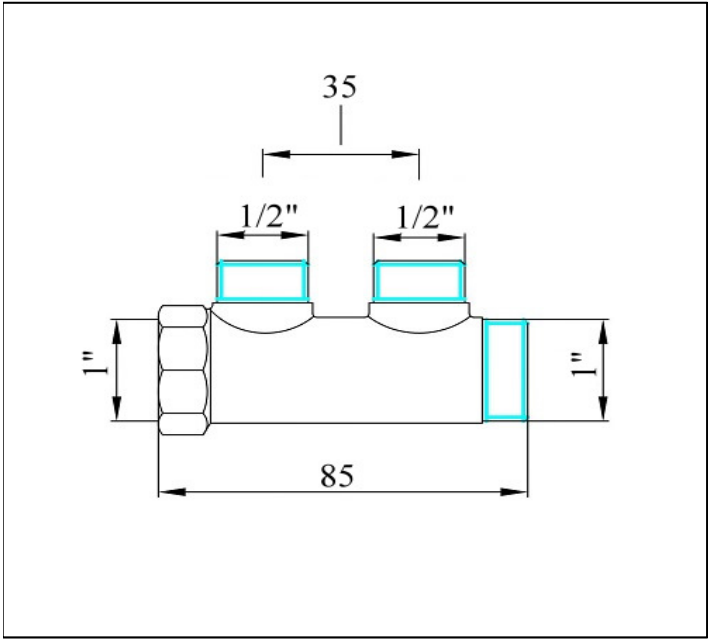

CL 982/3/4M IN 1" - OUT 3/4"

